
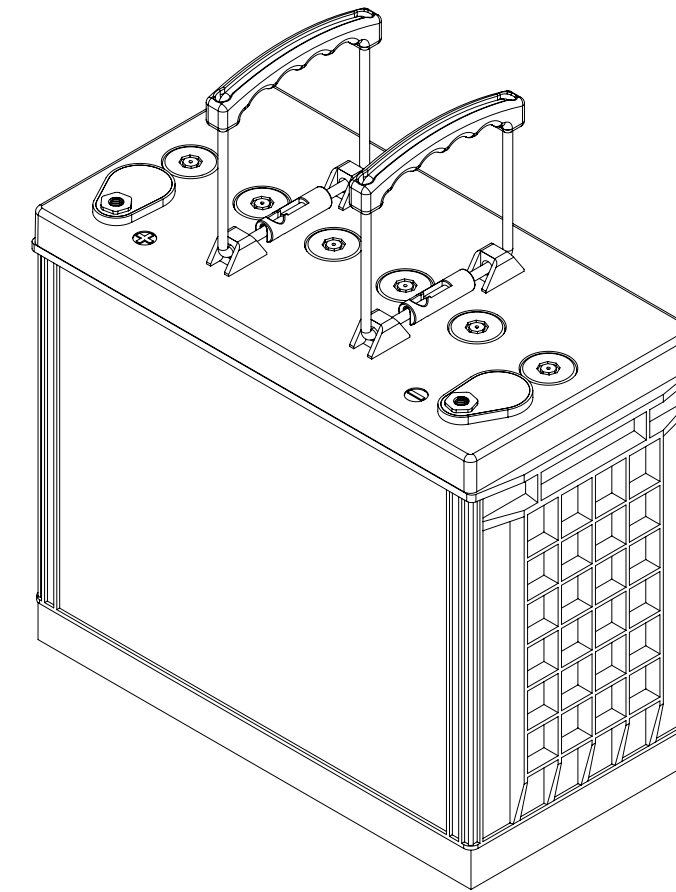




NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00400 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTIONS. PROCEDURES AND ASSEMBLY DRAWING ARE FOR INTERNAL USE ONLY.
2. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. DIMENSIONS ARE INCH [MILLIMETER].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).
5. TERMINAL HARDWARE KIT PROVIDED, PART NUMBER 6923.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED WEIGHT, 91 LBS [41.3 KG] WAS 97 LBS [44.0 KG]	12/4/12	JBT
B	REDESIGNED COVER	12/20/17	PH
C	STANDARDIZED ENVELOPE, ADDED NOTE 5	7/29/20	PH

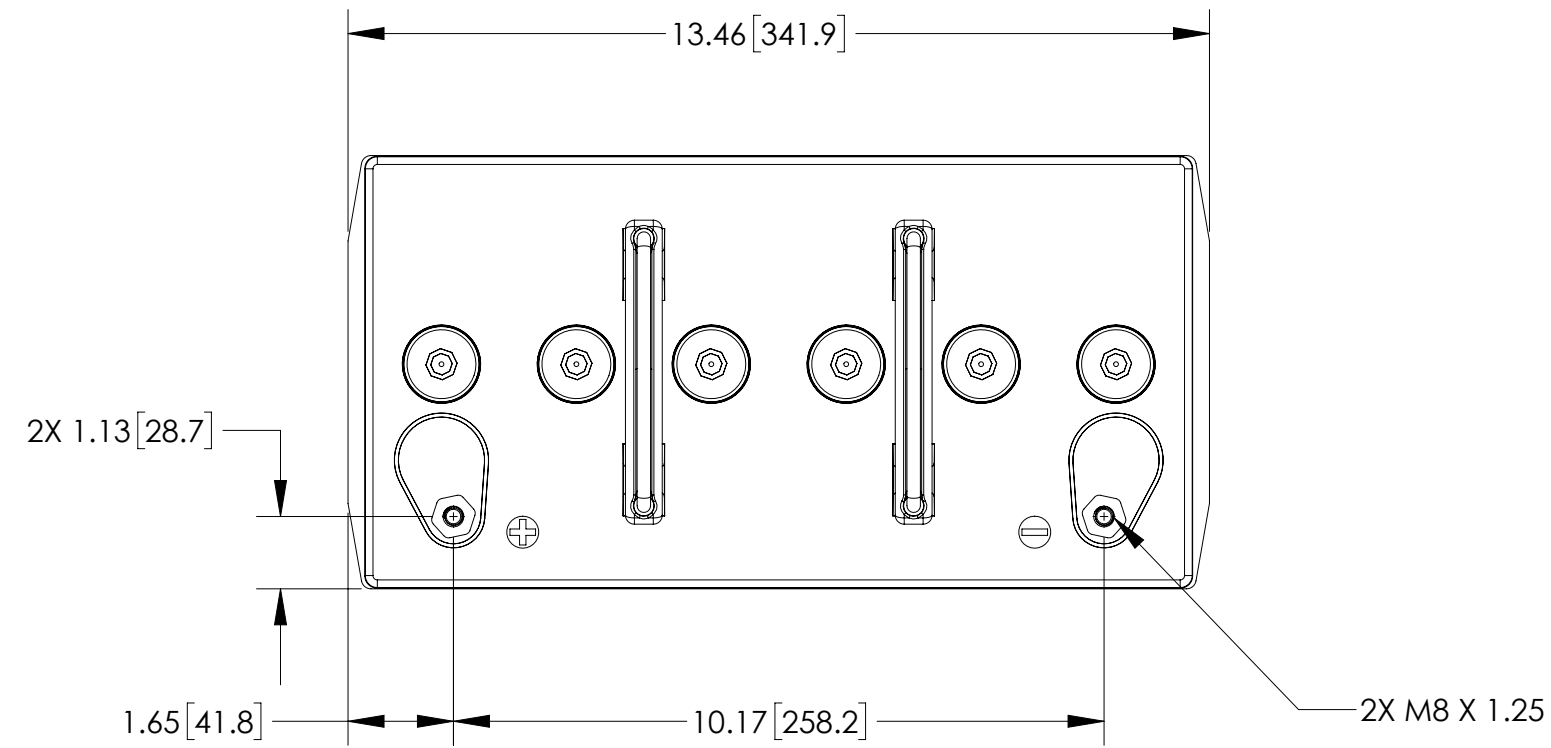

ISOMETRIC VIEW

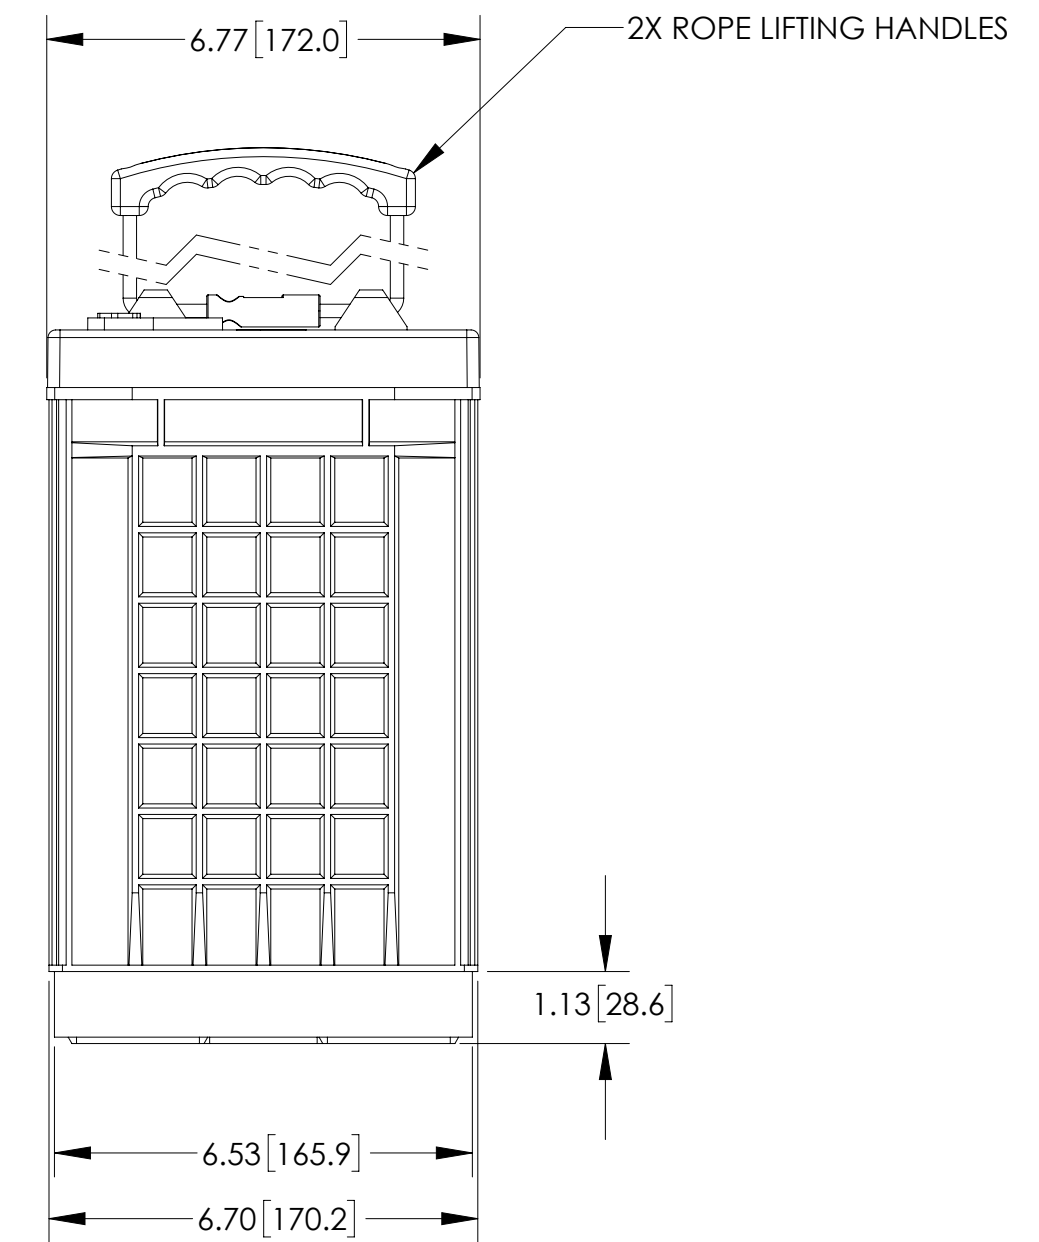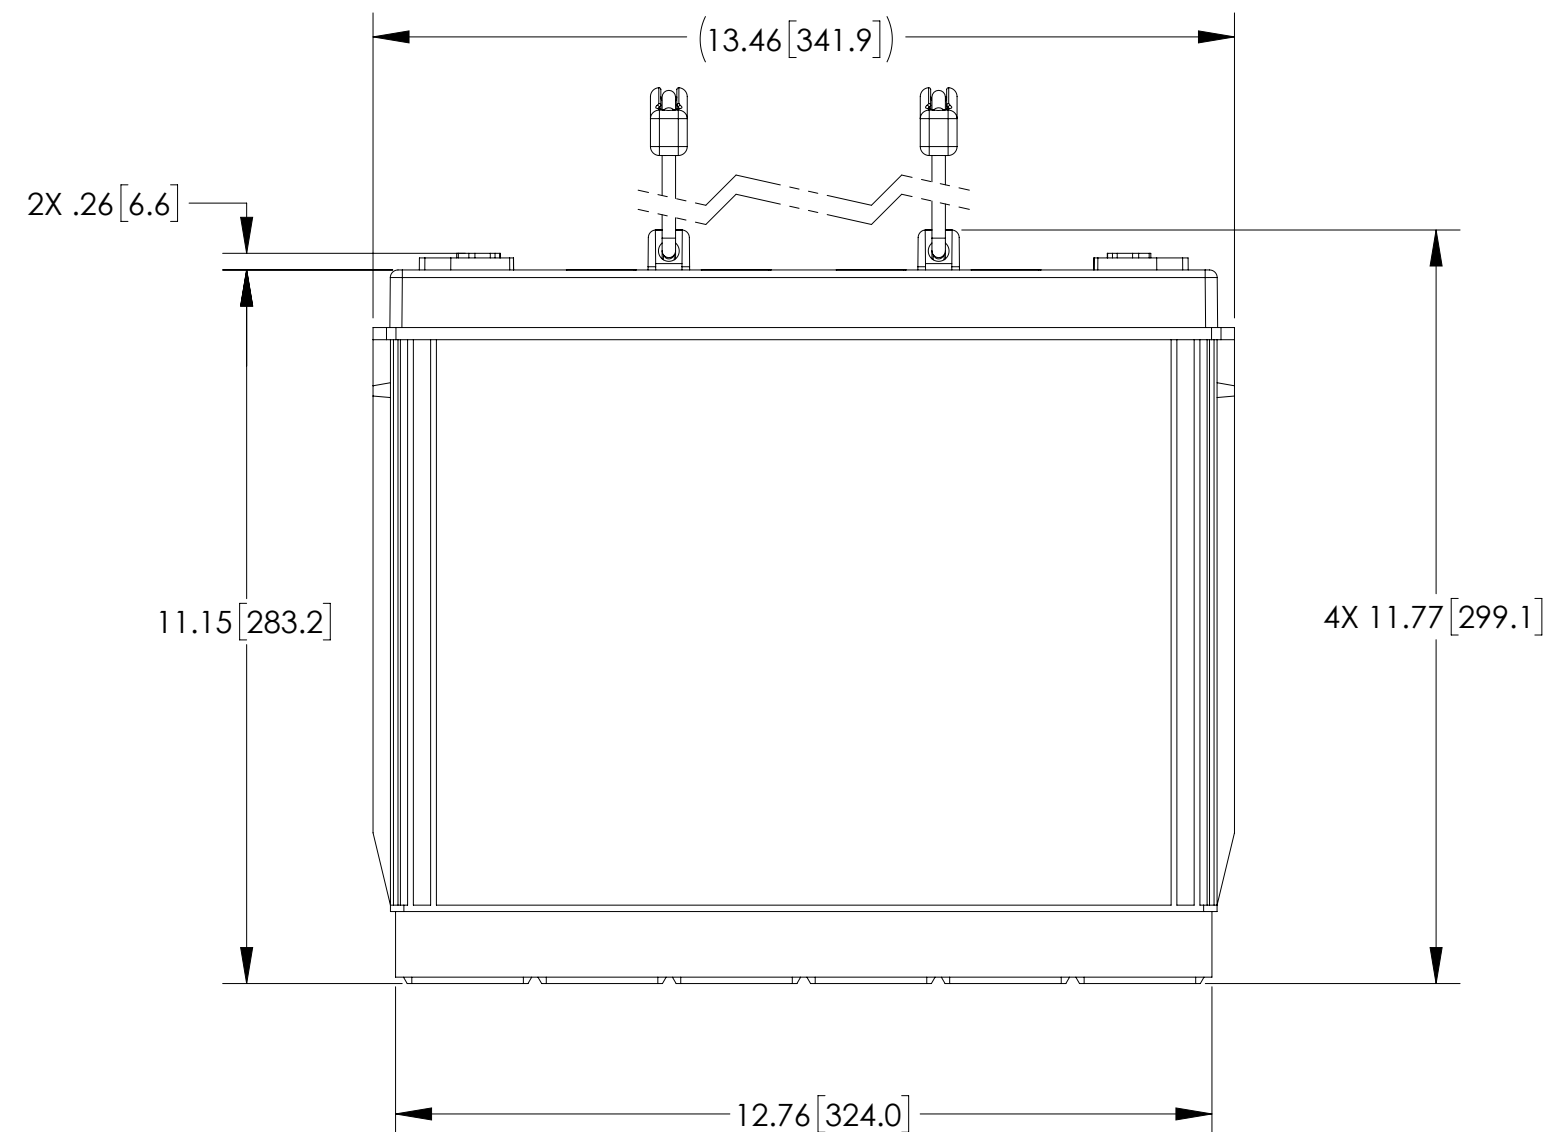

ENVELOPE DRAWING

CAPACITY RATINGS	
PART NUMBER	PVX-1530T
NOMINAL WEIGHT	91 LBS [41.3 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	153 AH

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:			CONTRACT NO.		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790			
FRACTIONS	DECIMALS	ANGLES	APPROVALS	DATE	TITLE			
±1/32	.XX ± .12 .XXX ± .060	±1°	DRAWN	6/30/09	BATTERY, SLA, 12 VOLT, PVX-1530T			
TREATMENT	NONE		CHECKED	7/13/09	SIZE	CAGE CODE	DWG NO.	REV
FINISH	NONE		APPROVED	7/14/09	C	63017	PVX-1530T	C
SIMILAR TO	CALC WT		ISSUED	7/30/20	SCALE	1:3		SHEET 1 OF 1